wellmeter
Smart Metering



Embrace The Future With Ultrasonic Water Meter Technology

ISO ISO4064 NSF CE MID EN 14154 OIML

Application Standards

wellmeter
WWW.WELL-METERS.COM

LXC-15F-40F

Application

LXC-15F-40F designed for measuring of cold water(T50) and hot water (T90) consumption in households, blocks of flats and for industrial applications.

- **M-BUS/RS485 Protocol:** *EN13757*
- **Modbus Baud Option:** *2400 or 9600*
- **Pulse Option:** *1L/Pulse or 10L/Pulse*
- **LoRa/LoRaWAN Frequency Rate:** *868MHz, 915MHz, 902MHz, 920MHz, etc*



Communication


M-Bus | RS485 | NB-IoT | 4G | LoRa | LoRaWAN

Feature Highlights


- Max battery life 15 years
- Exceptional IP68 proof
- Install in any position
- No air measuring
- Detecting pipe leaks
- Battery replacement externally

Dimensions


Nominal Diameter (mm)	DN15	DN20	DN25	DN32	DN40
Thread	G3/4B	G1B	G1 1/4B	G1 1/2B	G2B
L (mm)	110	130	160	180	200
H (mm)	102	110	120	125	130
W (mm)	95	95	95	95	95

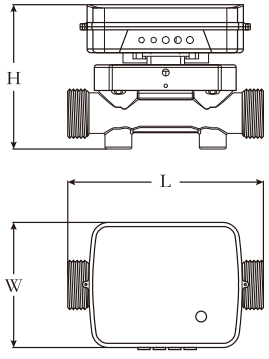

Error Curve

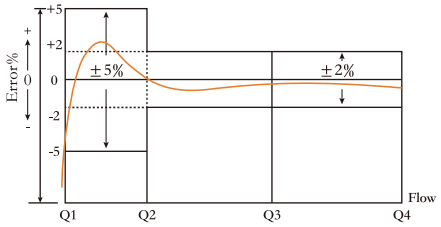

Head Loss Curve

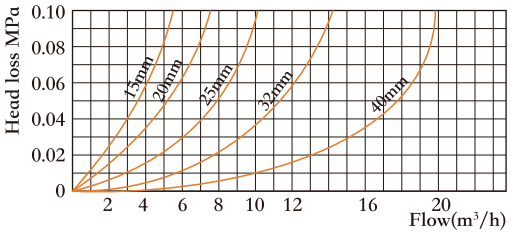

Main Technical Specifications

	DN15	DN20	DN25	DN32	DN40
$Q_4(Q_{overload})m^3/h$	3.125	5	7.875	12.5	20
$Q_3(Q_{max/permanent})m^3/h$	2.5	4	6.3	10	16
$Q_2(Q_{transitional})m^3/h$	0.025	0.04	0.063	0.1	0.16
$Q_1(Q_{min})m^3/h$	0.015625	0.025	0.039375	0.0625	0.1
Start Flow Rate m^3/h	0.002	0.002	0.003	0.005	0.005
Dynamic Range	R160				
Standard	ISO4064 / OIML R49				
Measured Medium	Water				
Metrological Class	Class 2				
Battery	3.6V, Li-battery ER26500(Default) / ER34615				
Battery Life	≥10 Years				
Consumption	<0.2mW				
Pressure Loss	Δp25				
EMC	E1				
Environmental Classification	Class B				
Protection Class	IP68				
Medium Temperature	T50/T90				
Storage Temperature	-25~55°C				
MAP	PN16				
Accuracy	±5% in range Q1≤Q<Q2				
	±2% in range Q2≤Q≤Q4				
Material	Brass 59-1				
The Installation Senstivity	U5/D3				
Climatic and Mechanical	M1				
Key-press	Touch control technology				
Display	LCD 9 digit + prompt				
Menu Contents	Instantaneous flow (m^3/h), cumulative flow (m^3), full screen display, meter address, cumulative working time (h), date (year/month/day), caliber, software version				
Display Range	Total flow :$0m^3$~+$99999.9999m^3$				
Communication	Optical interface, LoRaWAN, LoRa RF, M-BUS, RS-485, wM-Bus, NB-IoT, 4G(CAT-1), Pulse output, Sigfox.				
Display and Indication	Unit: L/m^3/Gal (optional)				
Data Storage	84 months				

Installation Position

